



GlobalTime Electronic Co., Ltd

GTD-368

NTP – Clock Display

GlobalTime offers a wide range of NTP servers and NTP clocks, radio clocks, CDMA clocks. By providing accurate, real-time information, we keep schools, hospitals, airports, train stations, media houses, offices, financial institutes, military bases, public security bureaus and other governmental institutes informed and on the same stage. Our clocks are widely used in more than 60 countries or regions over the world.

Digital PoE clocks draw both power and time updates from your organization's Ethernet connection. PoE clocks are energy-efficient and eliminate the need for AC receptacles and the use of batteries. You'll love the hassle-free installation and maintenance of these synchronized clocks

Optional Functions:

There is additional charge for optional functions.

(1) We can add a built-in bell relay to the clock, then it can be connected to a bell and the bell can be programmed to ring at 30 different moments.

(2) We can add a temperature sensor or humidity sensor to the clock then it can display time, temperature, and humidity alternately.



Key Features:

- Draw both power and time updates from the network
- Power over Ethernet (IEEE802.3af)
- Supports up to 5 SNTP servers for redundancy
- DHCP or Static IP addressing
- 12/24 Hour Mode with PM indicator
- Timezone management (Factory-set to your time zone)
- Automatic daylight saving time adjustment (where applicable)
- Easy plug and play installation.
- Accuracy ± 20 millisecond to NTP/SNTP time server
- Programmable countdowns
- Adjustable brightness settings
- If connection to NTP server is lost the clocks will continue to run on the built-in time base. When the connection is restored it will synchronize automatically
- The clock features time loss notification by having a light on on the right lower corner

Options include...

- 6-digit displays
- Red color
- Single-sided clocks


Distributed by.

PT. YASA PERSADA DEWANTARA

Office: Graha Krama Yudha, 4th floor Unit-B Jl. Warung Jati Barat No.43 Jakarta 12760

Direct Calls / WhatsApp: +62 818 8020 45

Projects & Application

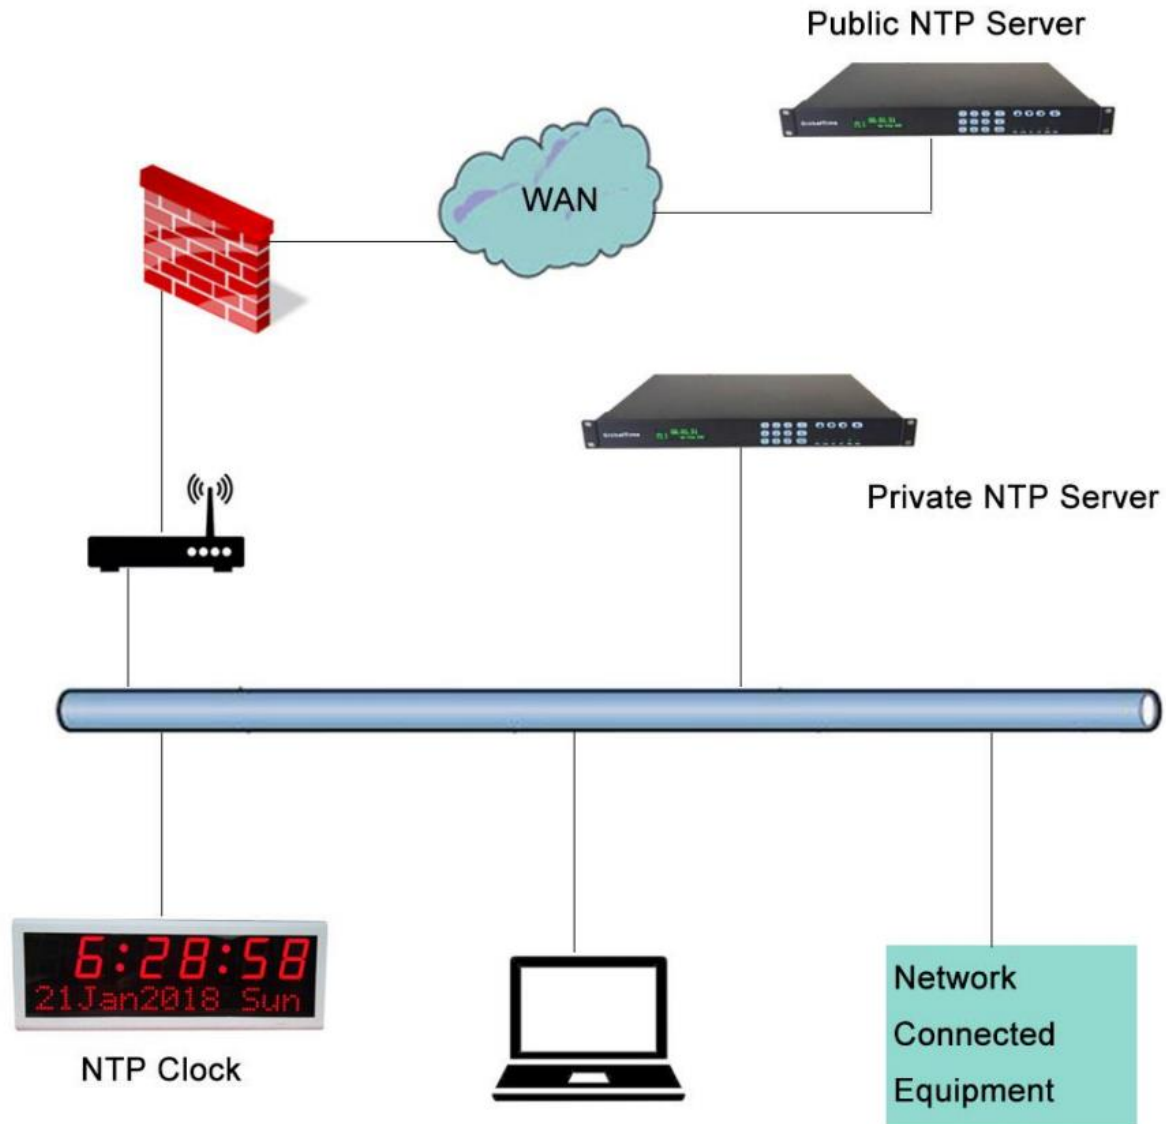

Applications:

Synchronized Time Systems for:

- Offices and home
- Healthcare
- Education (military schools)
- Manufacturing
- Insurance companies
- Financial institutes
- Transportation
- Government

Mechanical/Environmental:

- Size: 43cm*15.7cm*5.7cm or custom size 7" H x 26" W x 3.5" D
- Power: 12V/DC 2A or PoE Support
- Operating temperature: -10°C~60°C
- Storage temperature: -40°C~85°C
- Operational humidity: 0~90%

Others Model



GTD368-4SR



GTD368-6SR3



GTD368-6SR4



GTD368-4SB



GTD368-6SB3



GTD368-6SG4



GTD368-4SW



GTD368-6SW3



GTD368-6SW4



GTD368-4SG



GTD368-6SG3



GTD368-6SG4

